




Poles and bucks to be peeled or stripped on 3 sides, be round and free of knots. Top of poles to be 3"Ø min., braces to be 4"Ø min. and buck sticks to be 6"Ø min. Buck sticks to be mortised to provide tight joint.

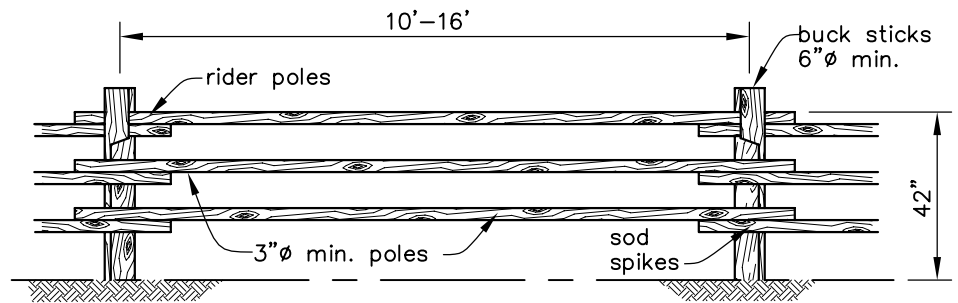

ELEVATION SHOWING POLES AND BUCKS

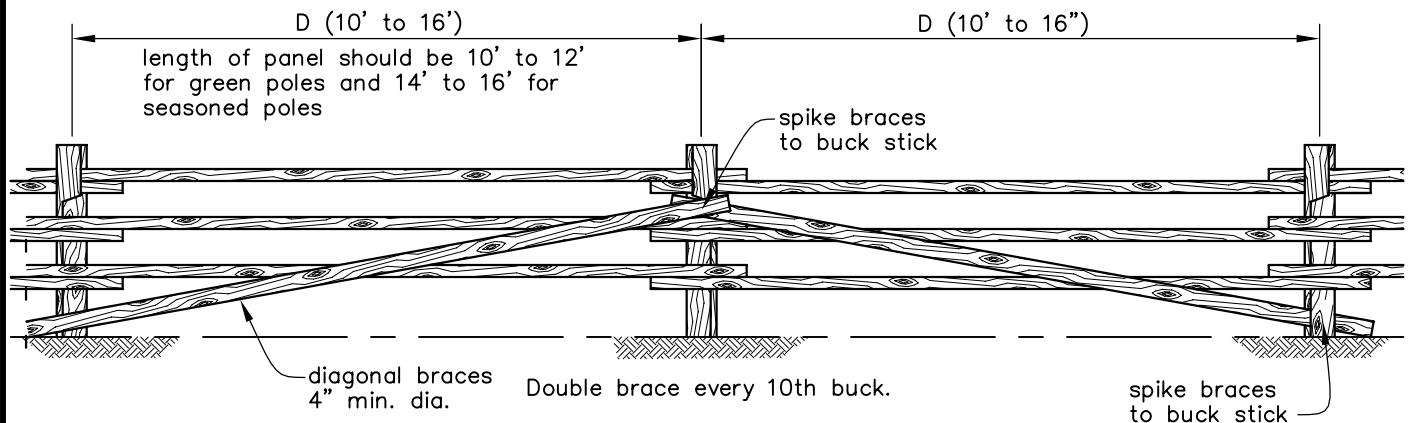

ELEVATION SHOWING DIAGONAL BRACING

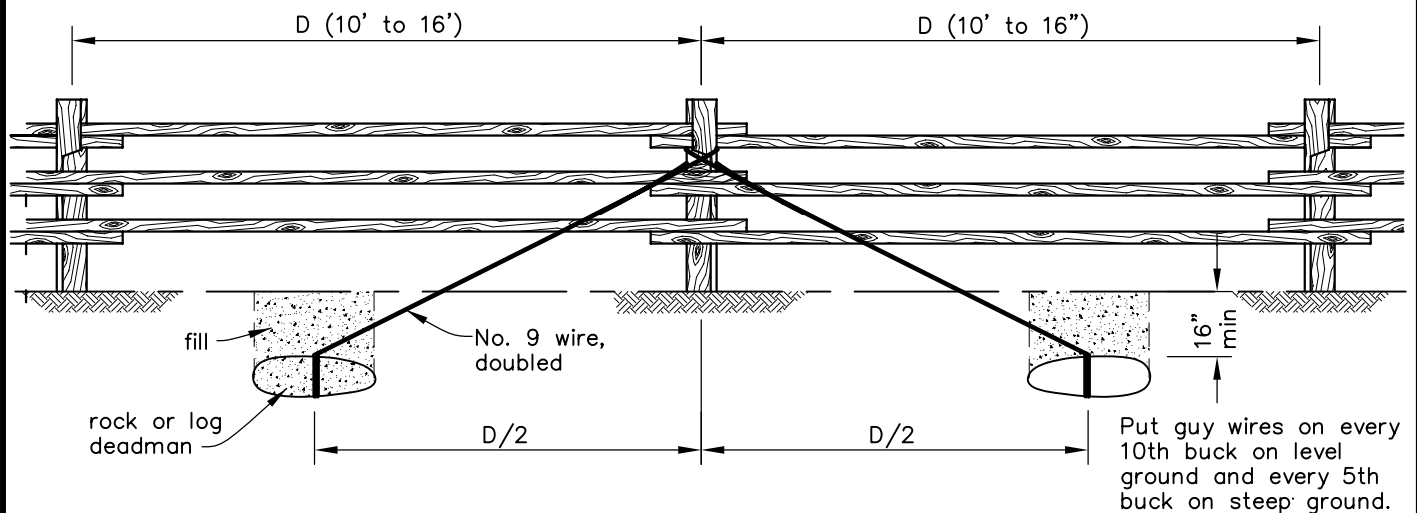

ELEVATION SHOWING GUY WIRE BRACING

This drawing requires supporting technical documentation prior to use and must be adapted to the specific site.

Drawing not to scale.

Designed _____	Date _____	CAD FILE NAME OR_BUCKPOLE.DWG	BUCK POLE FENCE
Drawn _____	2/2005	DRAWING NO. _____	
Checked _____	_____	SHEET _____ OF _____	
Approved _____	_____	_____	

LIVESTOCK FACILITIES

NRCS U.S.D.A. NATURAL RESOURCES CONSERVATION SERVICE